

Grease Traps – Underground Small – Jumbo Range




The Jumbo Grease Trap has:


- . Unique Design
- . Exceptional performance
- . 440 litre gross capacity
- . 300 litre retention capacity
- . Large sediment chamber
- . Lockable cover included



Inlet End Elevation

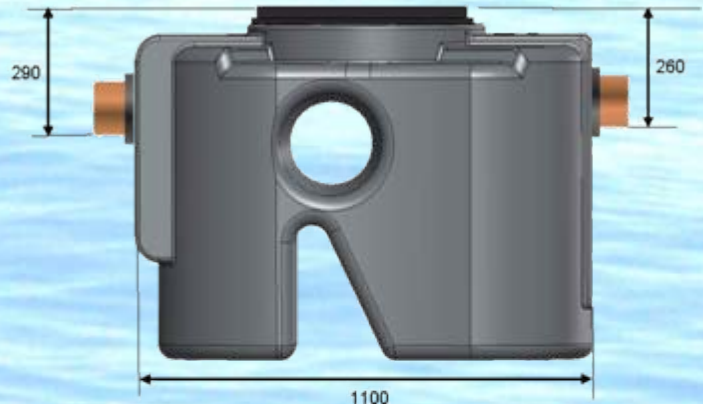

Outlet End Elevation

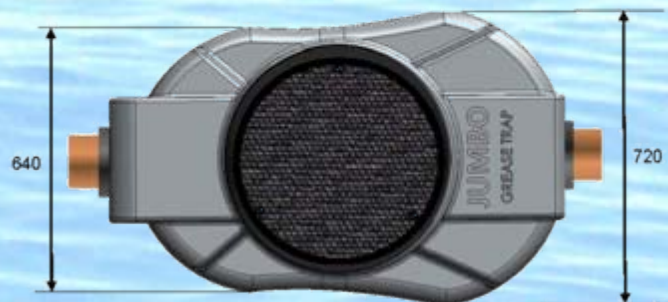

Installation

This range of small, underground grease traps are manufactured from robust polyethylene. They should be installed in a minimum of 150mm of concrete. Set them into a wet concrete base and then fill them with water before backfilling in the unit. If the units need extending to gain the appropriate invert then 235mm extensions are available at additional cost. Note: if the invert is to be more than 600m then extensions should not be used but the chamber bricked up as you would a normal manhole access chamber, this will allow access to the unit for servicing.

Maintenance

It is recommended that grease traps are professionally serviced on a regular basis to ensure effective and efficient function. Service intervals range from monthly to annually with an average of 3 months. For more information contact us at service@cateringwaste.com or call the number below.

Vat No: 825682312

Registration No: 4877361

Tel No: 01926 334466

Fax No: 01926 314795

Email: Info@cateringwaste.com